




PRINTASLEEVE

ABS

ABS is an expandable braided sleeve designed to have particular acoustic dampening properties. It is made by incorporating bulked PA monofilaments in a standard PET construction to reduce unwanted noise. It is available in sizes up to 50mm as standard and can be [cut](#) as required.

In addition to the protective and strengthening properties of standard PET monofilament braid, this braided hybrid jacket substantially reduces unwanted noise by lessening background noise and vibration interference thus allowing for purer sound reproduction. It is currently used in a number of industries such as the automotive industry. It is used in instrument panel assembly, military headsets, as well as the construction of certain hi-fi and other audio equipment. It is suitable for use on cables, hoses and pipes as well as many other applications and is easy to install readily expanding over splices and connectors.

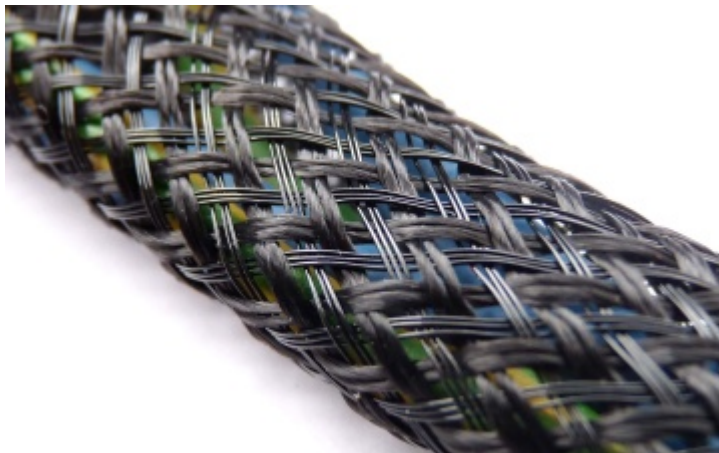

Technical Data

- **Operating Temperature** -50°C-+ 150°C
- **Flame Retardant:** Yes
- **Colours:** Black
- **Sizes:** 3mm ? 50mm
- **Packing:** Reels, mini-reels, mini-packs, cut to length, cut sleeves
- **Approvals:** UL approved, RoHS Compliant
- **Applications / Industries:** General, Commercial, Electrical, Electronics, Industrial, Mechanical, Automotive

Properties	Typical Values	Test Methods
General		
Operating Temperature	-50°C – + 150°C	
Short-term peak temperature	Up to 175°C	
Melt temperature	250°C	
Monofilament thickness	0.22mm & bulked	
Thermal		
Flammability	Self -extinguishing, V-2	FMVSS 302, UL94 on compound
Chemical		
Chemical resistance	Unaffected by most chemicals	
Toxicity	Halogen free	
Opacity	Low smoke density	

Size (mm)	Supplied diameter (mm)	Application range (mm)
3	3.0	1 – 3
4	4.0	2 – 7
6	6.0	4 – 10
9	9.0	6 – 15
12	12.0	8 – 19
15	15.0	10 – 23
20	20.0	13 – 28
30	30.0	20 – 38
40	40.0	30 – 48
50	50.0	40 – 58

Printasleeve Ltd is as diligent as possible in compiling and updating the above information. It reflects averages derived from product sample testing, is subject to normal manufacturing and testing tolerances and may be changed without notice. Furthermore aesthetic and textural style differences can result in local variation. For specific or further information concerning our products, their specifications and their utilization please contact us. E & OE

