




# PRINTASLEEVE

## Printasleeve HMT

**Printashrink HMT is an adhesive tape designed for use with heatshrink sleeving and mouldings. It is often used to seal against moisture or as a means of tamper-proofing.**

HMT hot melt tape permits the user to profit from the advantages of non-adhesive heatshrink sleeving in terms of variety of available sizes and colours while still being able to enjoy the performance of adhesive-lined heatshrink.

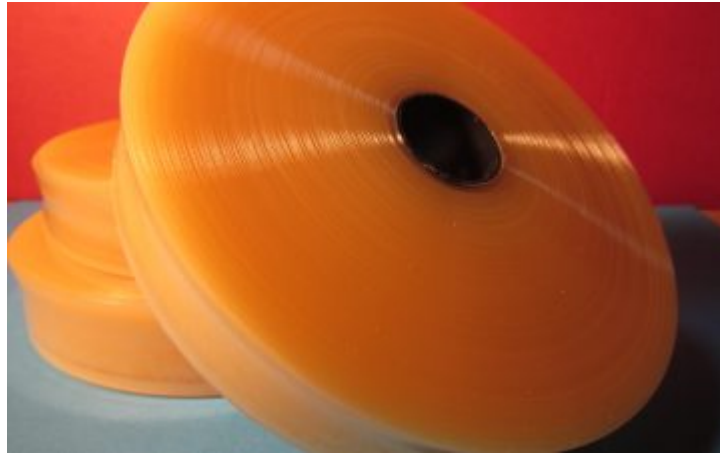

### Technical Data

- **Operating Temperature** -55°C - + 105°C
- **Flame Retardant:** Halogen Free
- **Colours:** Clear
- **Sizes:** One sizemm → One sizemm
- **Packing:** Rolls
- **Approvals:** DEF Stan 59-97 Type W (w), RoHS compliant
- **Applications / Industries:** General, Commercial, Electrical, Electronics, Industrial, Mechanical, Automotive, Marine

Properties	Typical Values	Test Methods
General		
Operating Temperature	-55°C - + 105°C	
Thermal		
Flammability	Halogen free	

Size (mm)	Supplied diameter (mm)	Nominal wall thickness (mm)
One size	25 (w)	0.25

### Key Information

vfddfsdf

- Max sleeve diameter** 1
- Max print area** 2 ?>
- Standard print colours** 3
- Recommended use** 4
- Print capability** 5
- Print format** 6
- Supplied format** 7
- Sleeving types** 8
- Tooling** 9

Printasleeve Ltd is as diligent as possible in compiling and updating the above information. It reflects averages derived from product sample testing, is subject to normal manufacturing and testing tolerances and may be changed without notice. Furthermore aesthetic and textural style differences can result in local variation. For specific or further information concerning our products, their specifications and their utilization please contact us. E & OE

