



# PRINTASLEEVE


## PB/PG

**PB/PG is a flexible, zero halogen, 0.22mm PET (polyethylene terethalate) monofilament expandable braided sleeve valued for its mechanical protection, chemical resistance, tensile and strengthening properties. It is available in black and grey, has a continuous operating temperature of -50° – +150°C and comes in 16 sizes ranging from 3mm to 100mm and can be [cut](#) as required.**

This expandable braided sleeve is ideally suited to a vast range of applications including the mechanical protection and bundling of wire, cables, hoses and flexible pipes in all industries including harsh environments. It is flexible, highly abrasion/cut and chemically resistant and readily expands over irregular shapes and bends before retracting. Being a braided jacket, it also provides lightweight protection that will not trap heat or moisture. Alongside these properties, it is also valued for its ease of application and the fact that few sizes are required to cover a large number of different applications.

## Technical Data

- **Operating Temperature** -50°C+ 150°C
- **Flame Retardant:** Yes
- **Colours:** Black, Grey
- **Sizes:** 3mm ? 100mm
- **Packing:** Reels, mini-reels, mini-packs, cut to length, cut sleeves
- **Approvals:** RoHS Compliant, UL approval on request
- **Applications / Industries:** General, Commercial, Electrical, Electronics, Industrial, Mechanical, Automotive

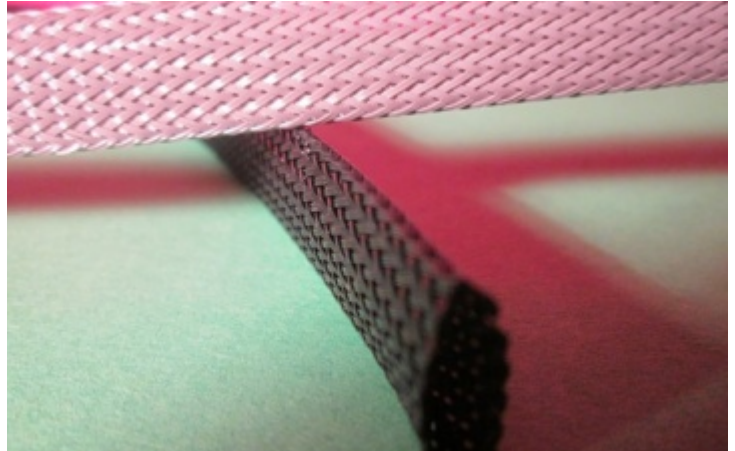

Properties	Typical Values	Test Methods
General		
Operating Temperature	-50°C – + 150°C	
Short-term peak temperature	Up to 220°C	
Melt temperature	250°C	
Monofilament thickness	0.22mm (0.25mm for 75 & 100mm dia)	
Physical		
Tensile Strength	100 000psi	
Thermal		
Flammability	Halogen free	
Limited Oxygen Index	-34%	
Chemical		
Chemical resistance	Resistant to most chemicals including automotive fluids	
Fungus resistance	Open structure doesn't retain moisture and support mould growth	
Toxicity	Halogen free	
Opacity	Low smoke density	



Size (mm)	Supplied diameter (mm)	Application range (mm)
3	3.0	1 – 3
4	4.0	1 – 5
5	5.0	2 – 7
6	6.0	3 – 9
8	8.0	4 – 11
10	10.0	5 – 12
12	12.0	7 – 15
15	15.0	8 – 17
20	20.0	10 – 21
25	25.0	14 – 25
30	30.0	18 – 32
40	40.0	20 – 40
50	50.0	30 – 55
60	60.0	45 – 75
75	75.0	65 – 98
100	100.0	85 – 140

Printasleeve Ltd is as diligent as possible in compiling and updating the above information. It reflects averages derived from product sample testing, is subject to normal manufacturing and testing tolerances and may be changed without notice. Furthermore aesthetic and textural style differences can result in local variation. For specific or further information concerning our products, their specifications and their utilization please contact us. E & OE

