


## Printashrink PF-A1 HW

Printashrink PF/A1 HW is a heavy walled heatshrink polyolefin with an integral thermoplastic adhesive liner. With a 3:1 shrink ratio, it has all the advantages of the standard PF/A1 3-1 and provides maximum reliability resistance for insulating and protecting joints and terminations. It is available in black as standard in sizes up to 350mm ID and can be [cut](#) and [printed](#) as required.

This glue lined, 110°C, heavy walled tube consists of a heatshrink polyolefin tube with a thermally activated inner adhesive liner. The inner liner melts and flows to encapsulate connectors and components providing moisture-resistant, environmental protection, strain relief and insulative properties which are perfect for high impact, abrasion, corrosion and chemical resistance. It is submersible and often used in direct burial installations. It is available in 1.2 metre lengths and with or without adhesive lining. We offer our full cutting and limited printing service on this specialist sleeve.

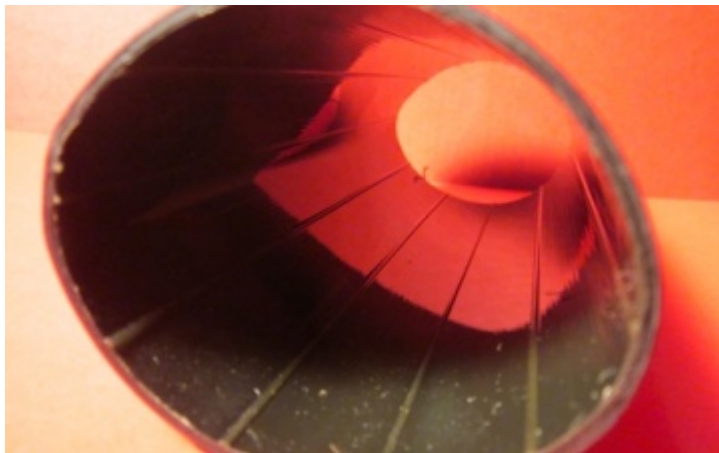

### Technical Data

- **Shrink Ratio:** 3:1 (min)
- **Shrink Temperature** 120°
- **Operating Temperature** -55°C – +110°C
- **Colours:** Black
- **Sizes:** 9/3mm ? 350/95mm
- **Packing:** 1.2 metre lengths, cut to length, cut sleeves
- **Print:** Yes subject to testing
- **Approvals:** RoHS Compliant
- **Applications / Industries:** General, Commercial, Electrical, Electronics, Industrial, Mechanical, Automotive, Marine

Properties	Typical Values	Test Methods
General		
Operating Temperature	-55°C – +110°C (jacket)	
Shrink temperature	120°C	
Shrink Ratio	3:1	
Physical		
Tensile Strength	14MPa	ASTM D 638
Ultimate elongation	>400%	ASTM D 638
Specific gravity	1.05 g/cm <sup>3</sup>	ASTM-D 792
Longitudinal change	+0% to -10%	UL 224
Water absorption	<0.15%	ISO 62
Thermal		
Heat ageing (168hrs)	at 150°C, elongation >300%	
Electrical		
Dielectric strength	>18kV/mm	IEC 93
Volume resistivity	10 <sup>13</sup> ?cm	IEC 93

Size (mm)	Supplied diameter (mm)	Shrunk diameter (mm)	Nominal wall thickness (mm)
9/3	9.0	3.0	1.80
15/4	15.0	4.0	2.40
22/6	22.0	6.0	2.70
33/8	33.0	8.0	3.20
40/12	40.0	12.0	4.10
4/12	45.0	12.0	4.10
55/16	55.0	16.0	4.10
75/22	75.0	22.0	4.10
85/25	85.0	25.0	4.30
95/30	95.0	30.0	4.30
115/34	115.0	34.0	4.30
130/36	130.0	36.0	4.30
160/50	160.0	50.0	4.30
180/50	180.0	50.0	4.30
200/60	200.0	60.0	4.30
235/65	235.0	65.0	4.50
250/65	250.0	65.0	4.50
265/75	265.0	75.0	4.50
300/85	300.0	85.0	4.50
350/95	350.0	95.0	4.80

Printasleeve Ltd is as diligent as possible in compiling and updating the above information. It reflects averages derived from product sample testing, is subject to normal manufacturing and testing tolerances and may be changed without notice. Furthermore aesthetic and textural style differences can result in local variation. For specific or further information concerning our products, their specifications and their utilisation please contact us. E & OE

